


HINIKER Conventional

2000 SERIES

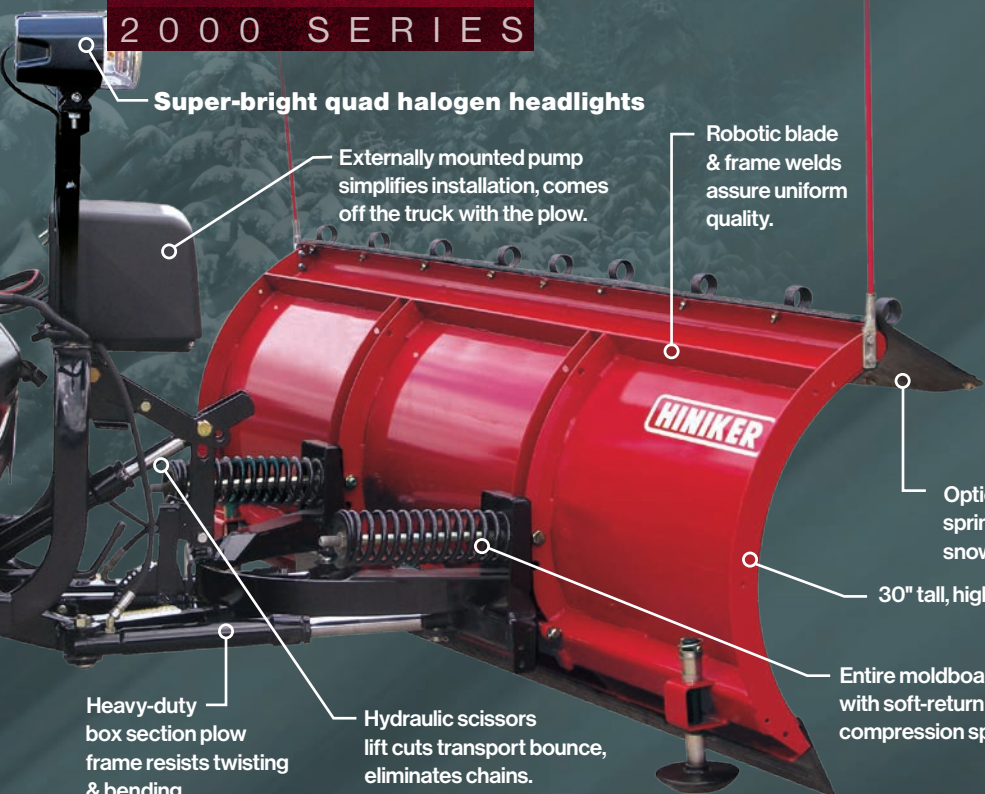

Super-bright quad halogen headlights

Externally mounted pump simplifies installation, comes off the truck with the plow.

Robotic blade & frame welds assure uniform quality.

Heavy-duty box section plow frame resists twisting & bending.

Hydraulic scissors lift cuts transport bounce, eliminates chains.

Optional molded poly, rubber, or spring-loaded rubber (shown) snow deflectors.

30" tall, high curve blade rolls snow off quickly.

Entire moldboard trips with soft-return compression springs.



Polyethylene snow deflector (optional) provides a slick surface for smooth snow flow.



Progressive action full-trip design activates compression springs for trouble free performance.

Get *Professional Performance* With Hiniker Straight Blade Plows

Take a professional approach to snow removal! Hiniker 2000 Series full-trip snowplows use box section frames and heavily reinforced moldboards for strength and durability. 30 inch tall high-curve moldboards move heavy snowfalls quickly. Our hydraulic scissors lift reduces transport bounce and bang. Convenient compact joystick controls can be mounted anywhere or held in the palm of your hand. And the Hiniker Quick-Hitch mounting system is one system that truly lives up to its name. Count on Hiniker's proven performance—the professionals choice!


CONVENTIONAL PLOW *Specifications:*

MODEL	2753	2803	2853
BLADE WIDTH	7 1/2'	8'	8 1/2'
BLADE HEIGHT	30"	30"	30"
GAUGE OF STEEL	12GA	12GA	12GA
VERTICAL RIBS	6	6	8
COMPRESSION TRIP SPRINGS	2	2	4
PLOW WIDTH @ 31° ANGLE	77"	82"	87"
CUTTING EDGE (HIGH CARBON 1084 STEEL)	3/8" x 6"	3/8" x 6"	3/8" x 6"
POWER ANGLING RAMS	1 1/2" x 10"	1 1/2" x 10"	1 1/2" x 10"
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	603 lbs.	614 lbs.	649 lbs.



PUT SNOW IN ITS PLACE

HINIKER *Conventional* 7000 SERIES

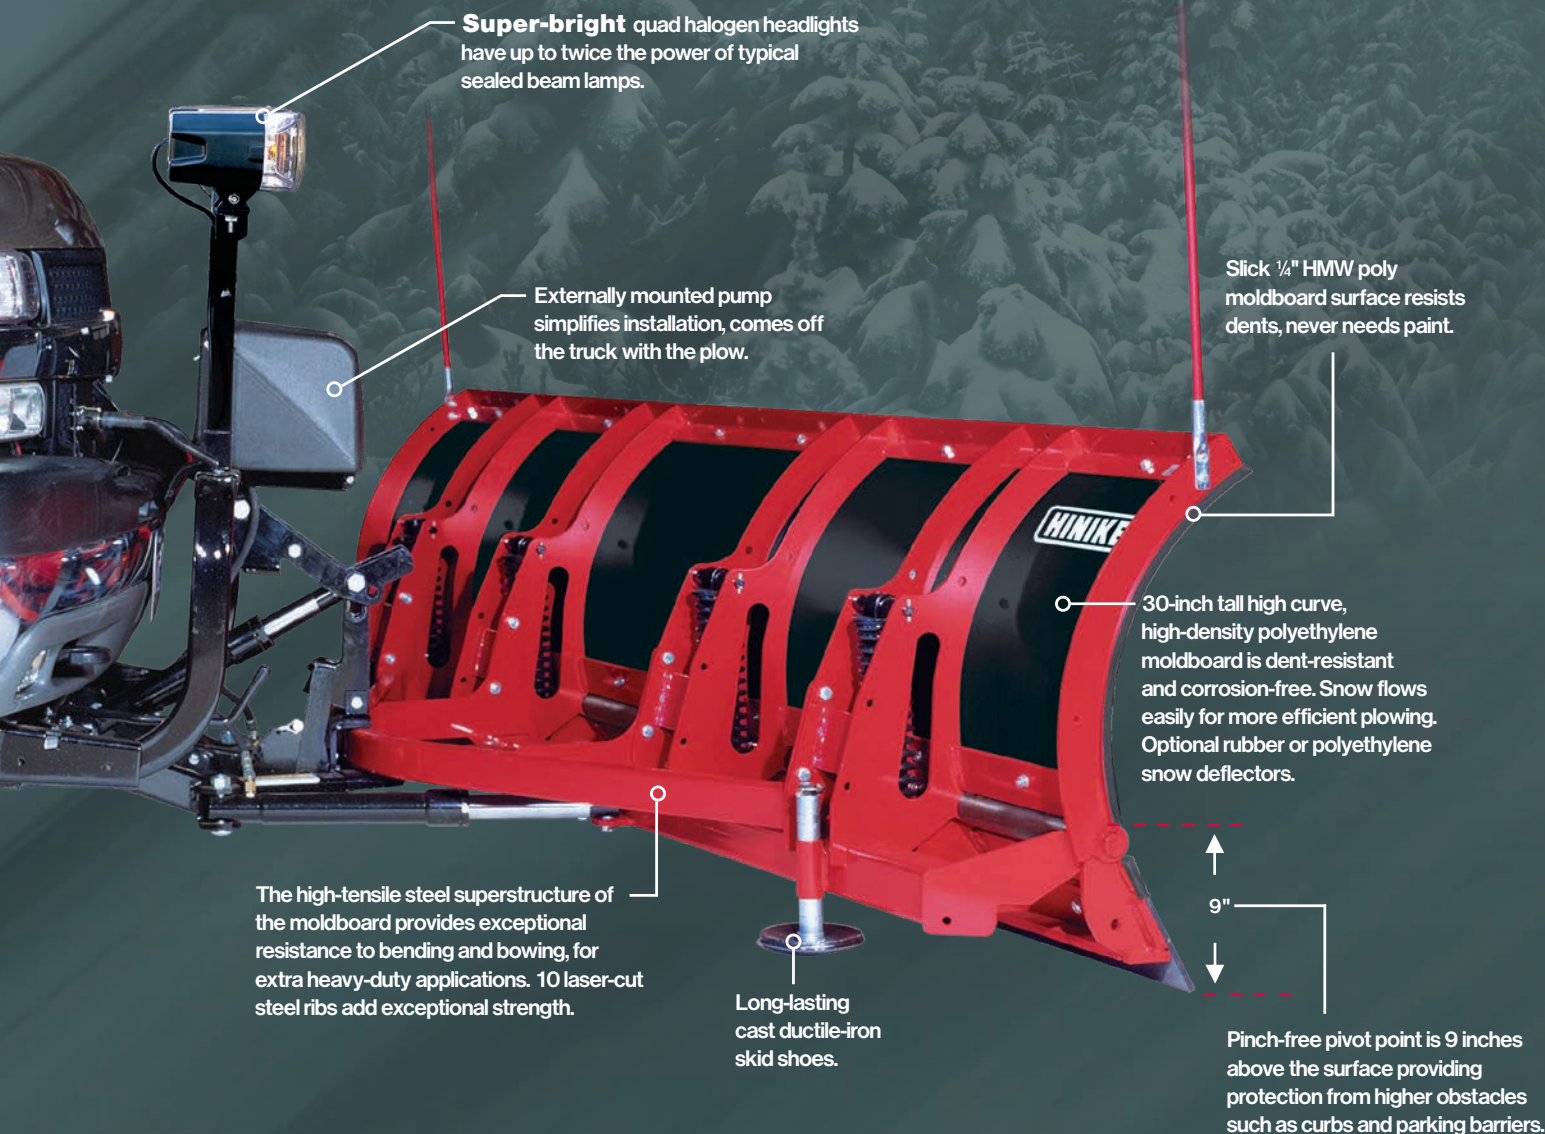

The *ULTIMATE* Performance With Hiniker Trip-Edge Straight Plows

The horizontal-truss moldboard design provides incredible strength, durability and resistance to bowing. Ten laser-cut support ribs add exceptional vertical strength. The corrosion-proof HDPE poly moldboard is dent-resistant with less surface friction for easier plowing and greater efficiency. Protection is provided by Hiniker's exclusive split trip-edge design.

- **High clearance split trip-edge**
- **Extra strength trussed moldboard frame**
- **Super-bright quad halogen headlights**
- **Exclusive Hiniker Quick-Hitch mounting system**



10 Foot Plow

Get professional plowing performance for your Ford F450/ F550, GM 4500/5500 or Dodge 4500/5500.


- **32" Tall high-capacity moldboard**
- **Corrosion-free, dent-resistant black HDPE polyethylene surface**
- **14 Rib welded moldboard frame**
- **Two-section split trip edge with 6 trip springs for maximum protection**
- **8 inch cutting edge—1/2 inch thick**



High clearance split trip-edges operate independently of one another, reducing stress and twisting forces on the plow.



Convenient, compact fingertip control mounts anywhere or can be hand held.

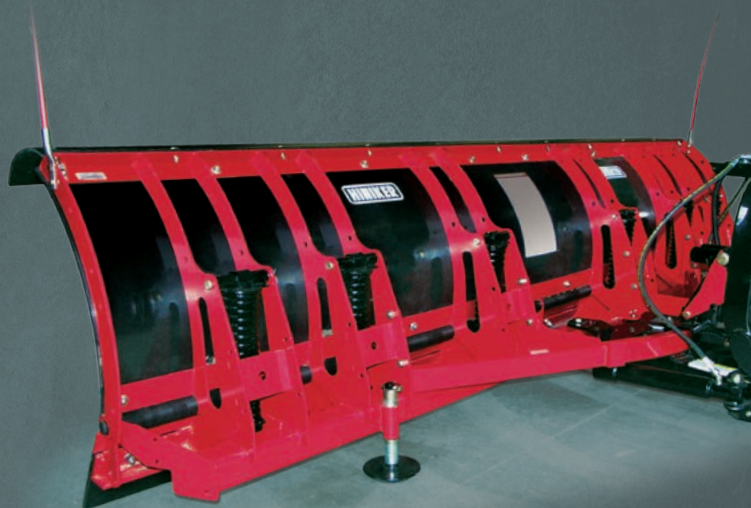

CONVENTIONAL PLOW *Specifications:*

MODEL	7802	7902	10331
BLADE WIDTH	8'	9'	10'
BLADE HEIGHT	30"	30"	32"
VERTICAL RIBS	10	10	14
COMPRESSION TRIP SPRINGS	4	4	6
PLOW WIDTH @ 30° ANGLE	83"	93"	103"
CUTTING EDGE (HIGH CARBON 1084 STEEL)	3/8" x 6"	3/8" x 6"	1/2" x 8"
TRIP PIVOT POINT HEIGHT	9"	9"	9.75"
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	733 lbs.	767 lbs.	938 lbs.



PUT SNOW IN ITS PLACE